

SONY®

NTSC

Digital Videocassette Recorder

DSR-V10

DVCAM™

*Handy DVCAM™ Deck,
the New Sony Video Walkman®
for Professional Video Applications*

Field editing system

Hands-free shooting with mini cameras

Back-up VTR

Handy desk-top viewer

and many more.....



★Simulated Picture

Compact and lightweight, excellent picture quality, fits in a pocket, great operational performance and a full range of optional items are all elements of the Sony DSR-V10 Video Walkman digital recorder that enables you to create professionally produced videos anytime and anywhere.

DVCAM Format/DV Playback Capability

The DSR-V10 uses the DVCAM format to give high video and audio quality, and the reliability required for professional use. It will also play back consumer DV format tapes (SP mode only).

<NOTE>The DSR-V10 can only accept mini-DVCAM and DV cassettes. It does not accept standard size cassettes.

Built-in LCD Monitor

The DSR-V10 incorporates a 5.5-inch LCD. This allows for easy field monitoring of your acquired video and can also serve as a handy desktop office viewer. With this built-in display, there is no need for an additional monitor.



DSR-V10

* Simulated Picture

InfoLITHIUM™ Battery System for Extended Operating Time

With this system, the precise amount of battery life remaining can be displayed on the DSR-V10 with up-to-the-minute accuracy. The combination of Lithium ion batteries and low power consumption provides the below operating times.

Continuous Recording Time with LCD ON	
Battery Type	Full Charge
NP-F750	100 min.
NP-F950/B	155 min.

<NOTE>The DSR-V10 can only accept InfoLITHIUM compatible battery packs. The unit can also operate on AC power with the supplied Sony DK-415 cable and AC-V700 AC Adaptor Charger.

Compact and Lightweight Body

By incorporating a compact VTR mechanism, the DSR-V10 is extremely small and lightweight. It weighs only 2lbs. 2oz. excluding a tape and



i.LINK™ (DV IN/OUT) Interface

The DSR-V10 incorporates the i.LINK (DV IN/OUT) interface which is based on the IEEE 1394 standards. It allows digital video/audio signal transfer with other VTRs and computers so equipped using a single wire connection. With this connection, the source material can be dubbed and edited without any deterioration of video and audio quality.



Other Features

- Analog video/audio IN/OUT
- Audio dubbing capability
- Auto repeat function
- Time code reset
- Duplicate with original TC



Simple Field Editing System with DSRM-E1 Edit Adaptor

The DSR-V10 can be configured as a simple field editing system with the optional Sony DSRM-E1 Edit Adaptor and DVCAM camcorders such as the Sony DSR-PD1. This allows you to perform simple editing in the field or while in transit between different locations.

Main Features of the DSRM-E1

- Direct connection to the DSR-V10 via a 20-pin connector
- Controls LANC VTRs as players (DSR-PD1/ DSR-20/ DSR-30)
- Built-in Jog/Shuttle dial
- Assemble editing with up to 99 events x 4 programs



Simple Editing System
(DSR-V10,DSRM-E1,DSR-PD1)

★Simulated Picture

Optional CVX-V1 and CVX-V3 New Mini Cameras

The Sony CVX-V1 and CVX-V3 Color Video Cameras are new mini models that are ideal for use with the DSR-V10. These two cameras provide excellent picture quality despite being remarkably compact. In fact their small body size opens up the possibility of totally hands-free shooting when used with the DSR-V10 - for example by helmet-mounting the camera.

Main Features of the CVX-V1

- Thumb-sized and lightweight (Camera head: .85oz, CCU: 4.8oz)
- 1/4-inch CCD Camera (410 k pixels)
- Directly attaches to the Video Walkman 20-pin connector (via the supplied Video Walkman Attachment)
- F1.8/f=3.9 mm lens with manual focus/iris
- Cable length : 2 m

Main Features of the CVX-V3

- Small and lightweight (Camera head: 2.6oz, CCU: 4.8oz)
- 1/4-inch CCD Camera (410 k pixels)
- 3x Zoom lens
- Built-in stereo microphone
- Splash-proof (Camera head)
- Directly attaches to the Video Walkman 20-pin connector (via the supplied Video Walkman Attachment)
- Cable length : 2 m



DSR-V10,CVX-V1



DSR-V10,CVX-V3

Accessories

- AC-V700 AC Adaptor/Charger
- NP-F750, NP-F950/B Battery Pack
- VMC-2DV/4DV DV Cable

★Simulated Picture

SPECIFICATIONS

DSR-V10

GENERAL

Mass:	970 g (2 lb 3 oz) (without a tape and battery)
Dimensions:	148 (W) x 62 (H) x 135 (D) mm (5 13/16 x 2 7/16 x 5 5/16) inches
Power Requirements:	DC: 7.2 V (battery operation) DC: 8.4 V (AC adaptor operation)
Power Consumption:	11.5 W (with LCD panel ON)
Operating Temperature:	0 °C-40 °C (32 °F-104 °F)
Storage Temperature:	-20 °C-60 °C (-4 °F-140 °F)
Tape Speed:	28.2 mm/sec. (DVCAAM mode)
LCD Screen:	5.5-inch
Digital IN/OUT:	i.LINK(DV IN/OUT) x 1(4-pin), IEEE-1394 based

VIDEO

Video Signal:	EIA standard, NTSC color
Video Input/Output:	Composite x 1 (RCA pin): 1V p-p, 75 Ω, unbalanced, sync negative S video x 1 (mini-DIN 4-pin): Luminance signal: 1V p-p, 75 Ω, unbalanced, sync negative Chrominance signal: 286 mVp-p(subcarrier burst), 75 Ω, unbalanced

AUDIO

Audio signals:	Recording: 48 kHz/16-bit, 32 kHz/12-bit, Playback: 48 kHz/16-bit, 32 kHz/12-bit, 32 kHz/16-bit, 44.1 kHz/16-bit
Audio Input/Output:	Phono jack (Stereo x 1(L x R), RCA x 2): -7.5 dBs, (0 dBu=0.775 Vrms)

OTHER CONNECTORS

LANC:	Stereo mini-mini jack
Headphone:	Stereo mini jack 8 Ω
Camera/Editor connector:	20-pin

SUPPLIED ACCESSORIES

AC-V700 AC Adaptor/Charger
DK-415 DK Cable
Carrying Belt
Operating instruction manual

DSRM-E1

GENERAL

Mass:	Main Unit: 160 g (5.6 oz) Controller: 340 g (12 oz)
Dimensions:	Main Unit: 69 (W) x 61 (H) x 134 (D) mm (2 3/4 x 2 1/2 x 5 3/8) inches Controller: 184 (W) x 42 (H) x 128 (D) mm (7 1/4 x 1 11/16 x 5 1/8) inches
Power Requirements:	DC: 7.2 V (supplied from the DSR-V10) DC: 8.4 V (AC adaptor operation)
Power Consumption:	Approx. 1.8 W
Operating Temperature:	0 °C-40 °C (32 °F-104 °F)
Storage Temperature:	-20 °C-60 °C (-4 °F-140 °F)


CONNECTORS

Multi Connector:	20-pin
Control Unit:	Mini DIN 8-pin
LANC:	Stereo mini-mini jack

MONITOR OUTPUT

Video Output:	Composite x 1 (RCA pin): 1V p-p, 75 Ω, unbalanced, sync negative
Audio Output:	Phono jack (Stereo x 1 (L1, R1)): 327 mV, impedance 470 Ω or less

■ DSR-V10

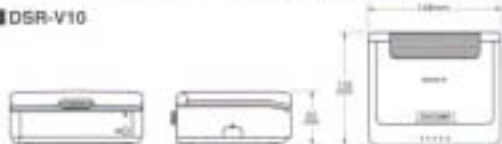

CVX-V1

GENERAL

Mass:	Camera Unit: 25 g (0.85 oz) CCU: 135 g (4.8 oz) (without a battery)
Dimensions:	Camera head: 22 (W) x 18 (H) x 60 (D) mm (1 4/16 x 23/32 x 2 3/8) inches CCU: 35 (W) x 110 (H) x 60(D) mm (1 7/16 x 4 3/8 x 2 3/8) inches
Power Requirements:	DC: 7.2 V (battery operation) DC: 8.4 V (AC adaptor operation)
Power Consumption:	1.8 W
Operating Temperature:	0 °C-40 °C (32 °F-104 °F)
Storage Temperature:	-20 °C-60 °C (-4 °F-140 °F)

CAMERA

Image Device:	1/4-inch Interline Transfer CCD
Picture Elements:	Total: 410 k Effective: 380 k
Lens:	F1.8
Focal Length:	f=3.9 mm (35 mm conversion: 38 mm)
Minimum Illumination:	2 lux
Gain Selection:	AUTO/Hold
White Balance:	AUTO/Hold
Shutter Speed:	AUTO, 1/60, 1/100, 1/250, 1/500, 1/2000, 1/10000

OTHER CONNECTORS (on CCU)

External mic IN:	Stereo mini-mini jack
Multi connector:	20 pin
Battery connector:	

SUPPLIED ACCESSORIES

Video Walkman Attachment Unit
Operating Instruction Manual

CVX-V3

GENERAL

Mass:	Camera head: 75 g (2.6 oz) CCU: 135 g (4.8 oz)(without a battery)
Dimensions:	Camera head: 36 (W) x 40 (H) x 70 (D) mm (1 7/16 x 1 5/8 x 2 7/8) inches CCU: 35 (W) x 110 (H) x 60 (D) mm (1 7/16 x 4 3/8 x 2 3/8) inches
Power Requirements:	DC: 7.2 V (battery operation) DC: 8.4 V (AC adaptor operation)
Power Consumption:	1.8 W
Operating Temperature:	0 °C-40 °C (32 °F-104 °F)
Storage Temperature:	-20 °C-60 °C (-4 °F-140 °F)

CAMERA

Image Device:	1/4-inch Interline Transfer CCD
Picture Elements:	Total: 410 k Effective: 380 k
Lens:	F 2.8-4
Focal Length:	f=3.5 mm -10.5 mm (35 mm conversion: 35 mm-105 mm)
Minimum Illumination:	5 lux
Gain Selection:	AUTO
White Balance:	AUTO

OTHER CONNECTORS (on CCU)

External mic IN:	Stereo mini-mini jack
Multi connector:	20 pin
Battery connector:	

SUPPLIED ACCESSORIES

Video Walkman Attachment Unit
Operating Instruction Manual

■ DSRM-E1 Controller



For more Information please contact:

ROSCOR
ROSCOR CORPORATION
1061 Feehanville Drive
Mount Prospect, IL 60056
(847) 299-8080
web <http://www.roscor.com/>

MK7101/25MC-9806

V-10917

Sony Electronics Inc.
1 Sony Drive
Park Ridge, NJ 07656
www.sony.com/professional

Printed in U.S.A.

© 1998 Sony Corporation. All rights reserved.
Reproduction in whole or in part without written permission is prohibited.
Features and specifications are subject to change without notice.
All non-metric weights and measures are approximate.
Sony, DVDCAM, i.LINK, Video Walkman and Info LITHUM are trademarks of Sony.
All other trademarks are the property of their respective owners.